

Polsperse™ 10

Polsperse 10 is an ultrafine kaolin produced by a high intensity pulverisation process. Polsperse 10 is specifically designed for use in solvent-based paints. The major advantage of Polsperse 10 is that it disperses rapidly in these paints to a fine Hegman Gauge value.

SPECIFICATION


Dispersion	(μm max.)	25
Brightness	(ISO R457)	87.5 \pm 1.0
+ 300 mesh	(mass % max.)	0.02
+ 10 μm	(mass % max.)	0.2
- 1 μm	(mass % min.)	77
Moisture	(mass % max. as produced)	1.5

TYPICAL PROPERTIES

Yellowness		4.2
Specific gravity		2.6
pH		5.5
Surface area	(BET; m^2/g)	16
Oil absorption	($\text{g}/100\text{g}$)	46
Aerated powder density	(kg/m^3)	320
Tapped powder density	(kg/m^3)	440
Water soluble salt content	(mass %)	0.20
Chemical analysis by X-ray fluorescence		
SiO_2	(mass %)	47
Al_2O_3	(mass %)	38

CAS No. 1332-58-7

TYPICAL PARTICLE SIZE DISTRIBUTION

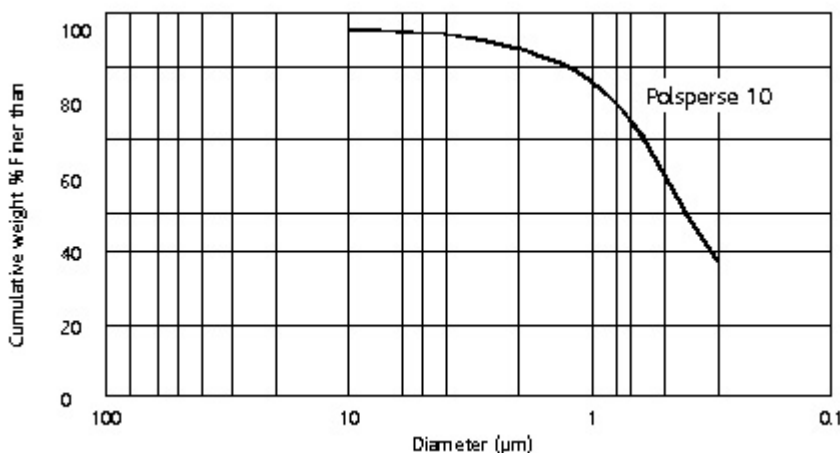

IMERY'S PERFORMANCE & FILTRATION MINERALS

Par Moor Centre,
Par Moor Road, Par
Cornwall, PL24 2SQ - UK
Tel: +44 1726 818000
Fax: +44 1726 811200



ISO 9001
FM 14752

Kaolin does not appear in EINECS as an individual entry but is classified as "naturally Occurring Substance" with the EINECS No. 310-127-6.

The data quoted are determined by the use of IMERY'S Minerals Ltd Standard Test Methods, copies of which will be supplied on request. Every precaution is taken to ensure the products conform to our published data, but since the products are based on naturally occurring raw materials, we reserve the right to change these data should it become necessary. Sales are in accordance with our 'Conditions of Sale', copies of which will be supplied on request.